Rechargeable 10” Portable PA Speaker

CS-2547

User Manual

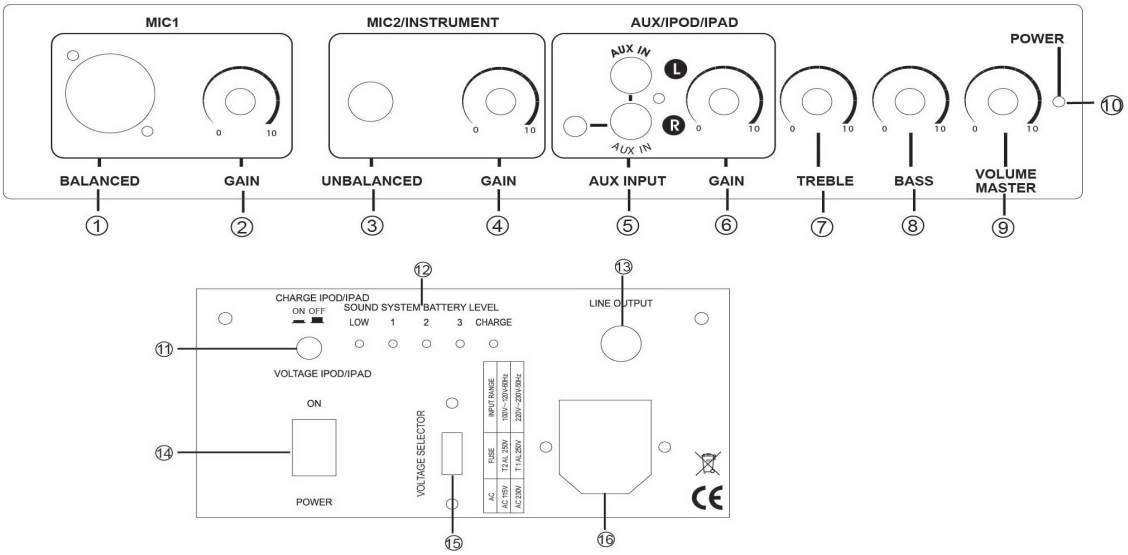

1. MIC1 INPUT---Connection for microphone (balanced XLR).

2. MIC1 GAIN---This controls microphone1 level.

3. INSTR/MIC2---Connection for instrument/microphone (6.5mm plug).

4. INSTR/MIC2 GAIN---This controls the instrument/microphone 2 level.

5. AUX INPUT/IPOD/IPAD---This input allows you to connect an external stereo signal. (RCA or 3.5mm socket)

6. AUX/IPOD®/IPAD® GAIN---This controls the CD or MP3 level.

7. TREBLE---Provides treble frequency equalization as required.

8. BASS---Provides low frequency equalization as required.

9. VOLUME MASTER---This controls the output level.

10. POWER LED---Illuminated when power switch is ON.

11. VOLTAGE IPOD®/IPAD®---Press down on this switch to charge the external iPod®/IPAD® equipment.

12. Battery level LED indicator---1.2.3 Green LED illuminates under normal working condition; Red “LOW” LED will be lit to indicate charging is required, please quickly charge with the suitable AC power. Green “CHARGE” LED will be lit to indicate charging..

13. LINE OUTPUT---Provides the audio signal to send to a recording device or line input on a console.

14. POWER SWITCH---Turns amplifier ON and OFF.

15. VOLTAGE SELECTOR/FUSE---Please make sure that your local voltage matches the voltage indicated on the unit before you attempt to connect and operate the AMP. Please use the correct fuse based upon your location.

16. AC INPUT---Connects the unit to the mains by provided power cord.

17. Adjusting the height of this screw according to the thickness of IPOD☒/IPHONE☒

18. Choosing the corresponding stand according to the model of IPAD☒

Technical Specifications

OUTPUT POWER -22WRMS

INPUT VOLTAGE FUSE- AC115V 60Hz~T2AL 250V
AC230V 50Hz ~T1AL 250V

CAUTION!!!TO REDUCE THE RISK OF FIRE, REPLACE ONLY WITH SAME TYPE FUSE.

WARNING!!! TO REDUCE THE RISK OF FIRE, OR ELECTRIC SHOCK. DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE

WARNING!!! THIS AMPLIFIER MUST BE EARTH GROUNDED**.**

Distributed by:
TechBrands by
Electus Distribution Pty Ltd
320 Victoria Rd
Rydalmere NSW 2116 Australia

Phone: 1300 738 555
Fax: 1300 738 500

www.techbrands.com

Made in China